


DCNM-DE

www.bo h t . o

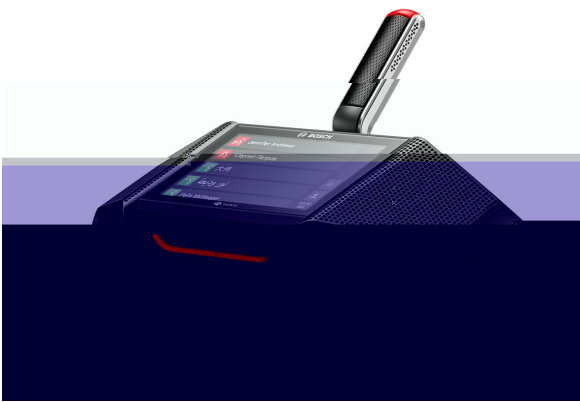

4.3

S

S

S

S

S

4.3

4.3

—
—
—

•
•

•
•
•

•
•

S

-
- 4.3
-
-
- ()
-
-

- 4.3
-
-
-
-

-
-
-
-

-
-
- 3. 0. 4
- 2 J4
-

DECLARATION OF CONFORMITY

/	
CE	DECL EC DCNM-DE

DECLARATION OF CONFORMITY

1	DCNM DE DICENTIS
---	------------------

DECLARATION OF CONFORMITY

	48 VDC
	5 W
	100 Hz – 20 kHz -3 dB
THD	< 0.1 %
	> 90 dB
	> 90 dB

	80 dB	IEC60914
	110 dB	IEC60914

	72 dB	0.5
	87 dB	
	0 dBV	
	3 dBV	
	> 32 ohm< 1k ohm	
	65 mW	

	109.22	4.3
NFC	ISO/IEC14443 A 106 kbps 848 kbps MIFARE 106kbps	

x x	72 x 259 x 139 2.8 x 10.2 x 5.5 (RAL 9017)
-----	--

	1035	2.3
--	------	-----

	5 °C +45 °C 41 °F +113 °F
--	------------------------------

	-30 °C +70 °C -22 °F +158 °F
--	---------------------------------

	< 90 %	> 5%
--	--------	------

DECLARATION OF CONFORMITY

DCNM-DE 4.3	S
----------------	---

DCNM-DE	
---------	--

DCNM-HDMIC	S	S
S DCNM-HDMIC		

DCNM-MICS	S	S
S DCNM-MICS		

DCNM-MICL	S	S
S DCNM-MICL		

DCNM-TCDD	10	DCNM-xD	0
0	0	S	0
DCNM-TCDD			

ACD-MFC-ISO	MIFAREclassic	1kB	50pcs
2		0	/
ACD-MFC-ISO			

ACD-EV1-ISO MIFARE EV1 8kB 50pcs
 S 2 V 0 /

ACD-EV1-ISO

DCNM-LSSL S S S
 S
 SYS
 DCNM-LSSL

DCNM-LSVT S S
 S S
 S S

DCNM-LSID S S S S
 S S
 S S
 S
 DCNM-LSID

DCNM-LSDU 2 S S
 S S S
 S S
 DCNM-LSDU
