


| s

DCNM-DSL

www.bo h t . o

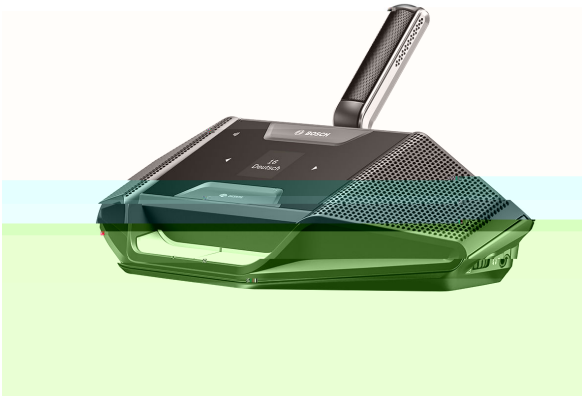

u
u
u

-
-
-

•
•
•
•
•

3. 0.4 2 J4

DECLARATION OF CONFORMITY

/
CE DECL EC DCNM-DSL

DECLARATION OF CONFORMITY

1 DCNM DSL DICENTIS

DECLARATION OF CONFORMITY

48 VDC

3.6 W

100 Hz – 20 kHz -3 dB

THD < 0.1 %

> 90 dB

> 90 dB

80 dB IEC60914

110 dB IEC60914

72 dB 0.5

87 dB

0 dBV

3 dBV

> 32 ohm< 1k ohm

65 mW

36.58 1.44

LCD

NFC ISO/IEC14443
A 106 kbps 848 kbps MIFARE 106kbps

x x

72 x 259 x 139
2.8 x 10.2 x 5.5

(RAL 9017)

955 2.1

5 °C +45 °C
41 °F +113 °F

-30 °C +70 °C
-22 °F +158 °F

< 90 % > 5%

DECLARATION OF CONFORMITY

DCNM-DSL .44 S

DCNM-DSL

DCNM-HDMIC S S

S DCNM-HDMIC

DCNM-MICS S S

S DCNM-MICS

DCNM-MICL S S

S DCNM-MICL

DCNM-TC D 10 DCNM-xD S 0

0 DCNM-TC D

ACD-MFC-ISO MIFAREclassic 1kB 50pcs
2

ACD-MFC-ISO 0 /

ACD-EV1-ISO MIFARE EV1 8kB 50pcs
 2
 S V 0 /

ACD-EV1-ISO

DCNM-LSID
 S S S
 S S S
 S
 DCNM-LSID

DCNM-LSDU 2
 S S S
 S S S
 S
 DCNM-LSDU
