


DCNM-D

www.bo h t . o

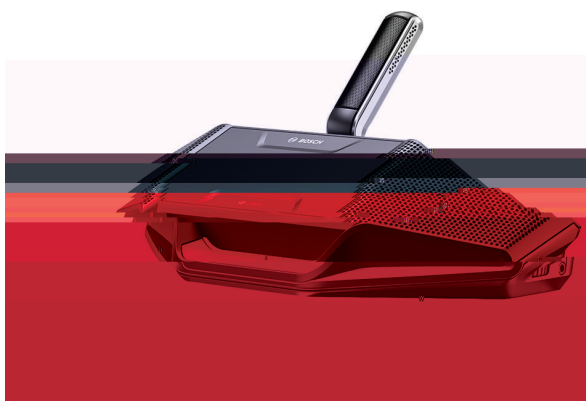

u
u
u

S

S

S

S

S

•

•

S

•

—

•

—

—

—

—

•

•

•

•

•

3.

0. 4

2

J4

•

•

—

•

•

•

•

•

DCNM-D

	/
CE	DECL EC DCNM-D

DCNM-D

1	DCNM D DICENTIS
---	-----------------

DCNM-D

	48 VDC
	3.1 W
	100 Hz – 20 kHz -3 dB
THD	< 0.1 %
	> 90 dB
	> 90 dB

	80 dB	IEC60914
	110 dB	IEC60914

	72 dB	0.5
	87 dB	
	0 dBV	
	3 dBV	
	> 32 ohm < 1k ohm	
	65 mW	

x x	72 x 259 x 139 2.8 x 10.2 x 5.5 (RAL 9017)
	955 2.1

	5 °C +45 °C 41 °F +113 °F
	-30 °C +70 °C -22 °F +158 °F
	< 90 % > 5%

DCNM-D

DCNM-D S

DCNM-D

DCNM-HDMIC S S
S DCNM-HDMIC

DCNM-MICS S S
S DCNM-MICS

DCNM-MICL S S
S DCNM-MICL

DCNM-TCD 10 DCNM-xD 0
0 S 0
0 DCNM-TCD

DCNM-LSDU 2 S S
S S S
DCNM-LSDU

:
333 203 9
20033
+ 6 2 22
+ 6 2 22 2099
htt :// .bo h t . o
400 3 0 669
t @ .bo h. o
20 |
20 9 9 23 |zh S V 9. 20