

▶ JBL' u (BD) B u 75

▶ C 25 u (1) 165 (6½)

▶ E u u u

▶ H 4.5 (15) u

▶ (- H).

▶ L ()

▶ 8 70 /100

C 67HC/ u u, u -

u u u

u u u

JBL' (BD) B u

I u (BD) E EC

u C - 295

(11.6) u u

u u

u u

C 67HC/ u u

u u

u u

4.5 (15) u I u

u L

u

165 (6½) u

25 (1) u

u 25 (1) u

u u

u u

u u


60 C 67HC/ u u

70 /100 u u

8- u

Eu -

u F u u

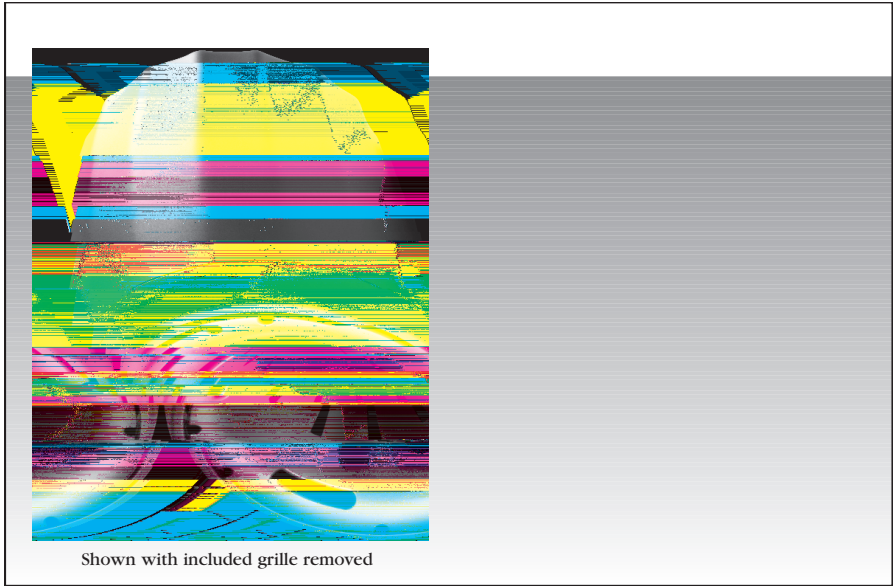

System:

F u	(-10 B): 75 H	17 H
F u	(3 B): 110 H	16 H
P C	75 C u u P N P (300)	150 C u u P P
N	93 B	
N C A	75 (+15 /-20)	
D	(): 10.4	
D I	(DD): 9.8 B	
M u PL @ 1	112 B u u	, 118 B
I	8	
	70 : 60 , 30 , 15 & 7.5	
	100 : 60 , 30 , 15	
I L	0.5 B @ 7.5 , 0.5 B @ 15 , 0.6 B @ 30 , 0.7 B @ 60	

Transducer:

LF D	165 (6.5)	u u u
	u u , 25 (1)	
HF D	25 (1.0)	u
	- u , u u	

Enclosure:

E u M	: H
G	: (-)
E	: E M 810 u , u &
	IP44 IEC 529
	: u - 2-
	- u.M . 12 A G (2.5 2). u
	u : u u (u 4.5 (15)
	2 (0.077) - , - u
	u G . C u - L 45 (99)
A	: L1480, L1876. I
	IEC60849/EN60849. u
G	: C A C 3426-01 & C 3426-81. L1598 L2239 ,
D	: 333 (13.1) 344 (13.6)
	.369 (14.5) u
N	(): 5.9 (13)
	(): 14.1 (31)
I u A	: u (u , - , u) , 2-
	u -
O A	: M C-PC60HC /
C	: A (- H). P

¹ Fu - (u)

² C u u P N IEC- 6 B - - 100 u

u u . C u u P

³ Fu - (u) , 1.5 H 10 H . C u u P N

JBL u u . C u u u

